

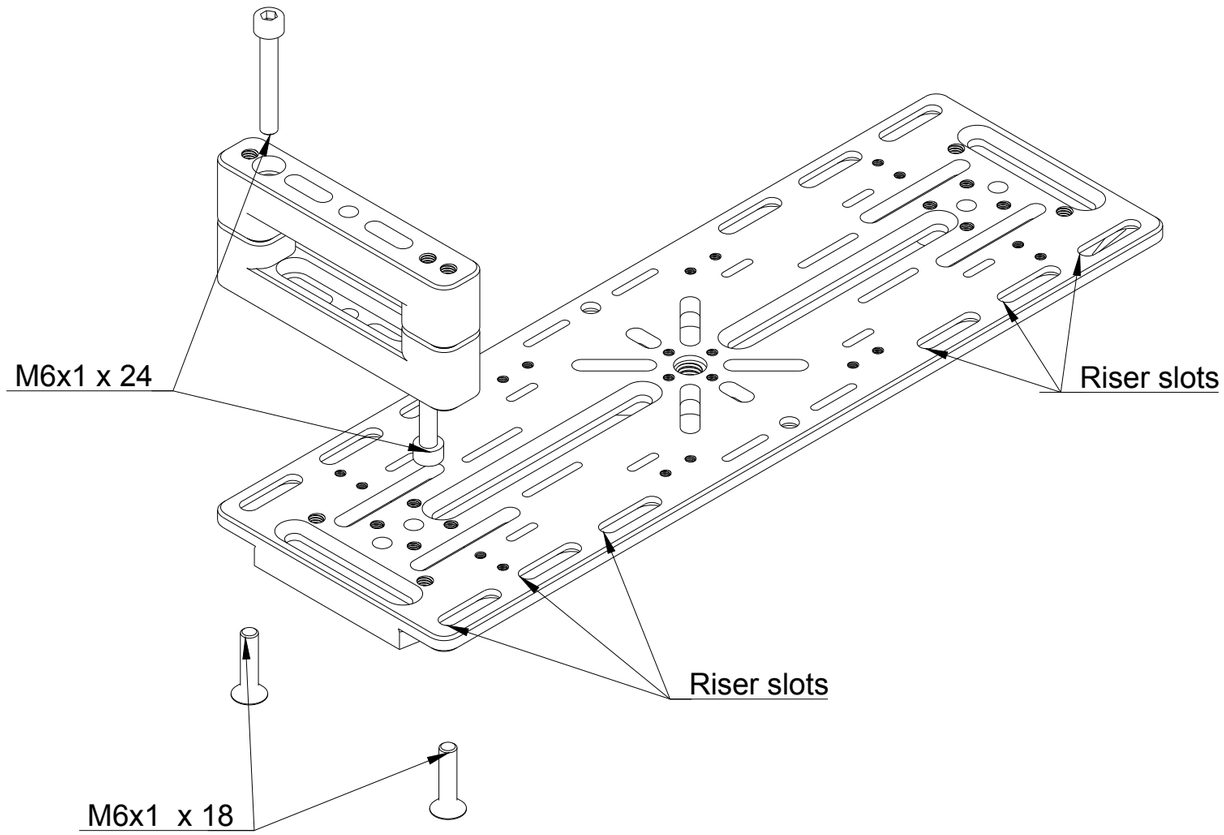


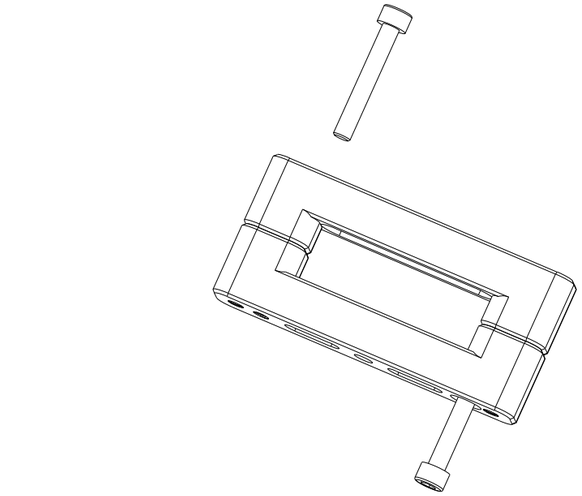

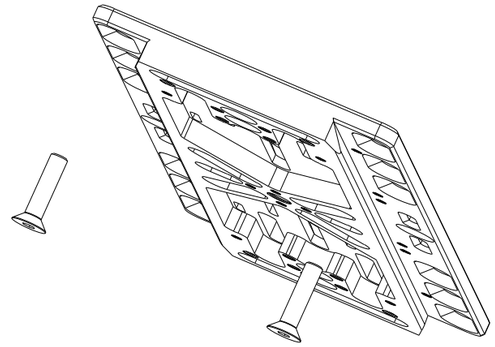

Double Riser 25 installation

1. Assemble two PEG-RISER-25 with the provided Counterbore M6 Bolts
2. Use the two provided M6 Countesunk bolts to seccurely mount Double PEG-RISER Assembly to Riser Slots depending on the telescope ring distance (Adjustable from 315mm to 127mm)

Dept.	Technical reference	Created by	Approved by
R&D		GEORGE KARANTZALOS 17/10/25	
		Document type	Document status
		Title: Double PEG-RISER Assembly instructions	DWG No.
			Rev. / Date of issue / Sheet: 1/1